




Hardware Installation Manual

EyeRIS Interactive Mount

1. Components

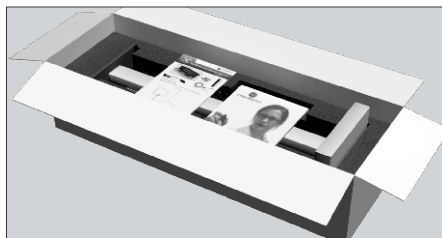

Software
Installation CD




Rechargeable EyeRIS Stylus



Interactive Mount
Integrated with EyeRIS_{2.0}



Front Panel

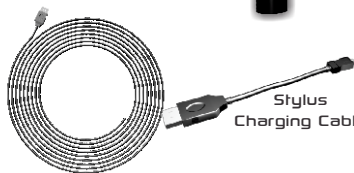

BMtr USB Cable


Stylus
Charging Cable




OPTIBAR Strips

2. EyeRIS Interactive Mount installation on wall

Step1: Measure 33" from the floor & mount the whiteboard on the wall at the desired location.

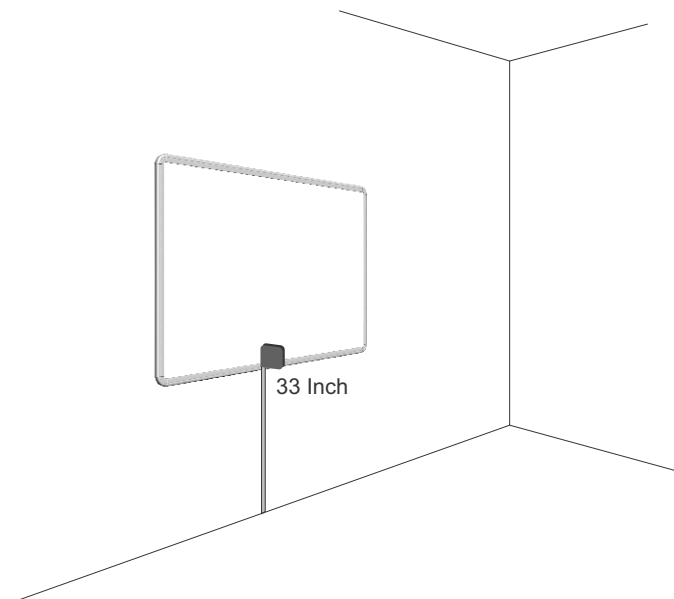


Step2: Mark the centre of the whiteboard as shown in picture below.

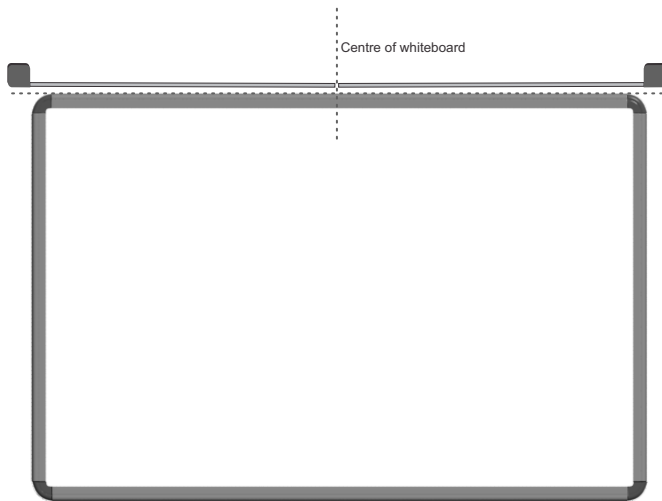


Note : Depending on the positioning of short throw projector lens, the centre line of EyeRIS Interactive Mount needs to be shifted on right/left.


Example : For Optoma ST projector Model No. CB611ST, the centre line to be shifted 6 cm on the left.

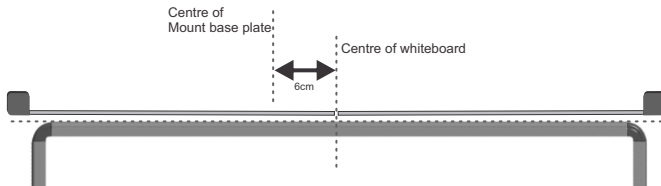


Step3: Place the mount base 15" above the board/ Projection area as shown below & mark the holes.

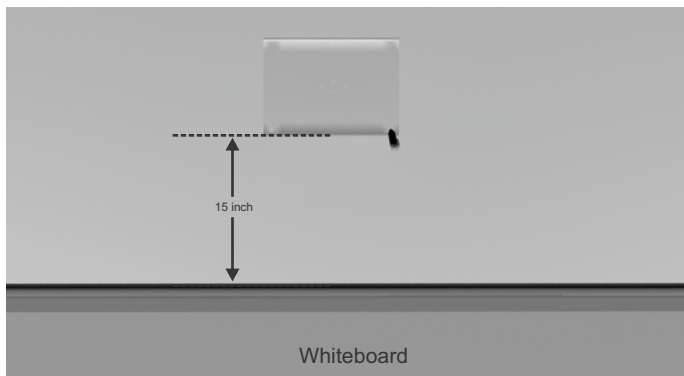


Step4: Make holes & fix the fastener by using the drill machine & hammar.

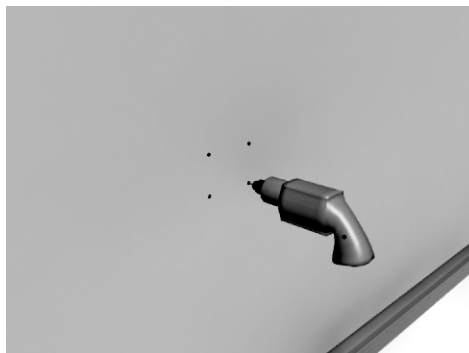


Step5: Fix rod on the base plate with nuts & bolts.

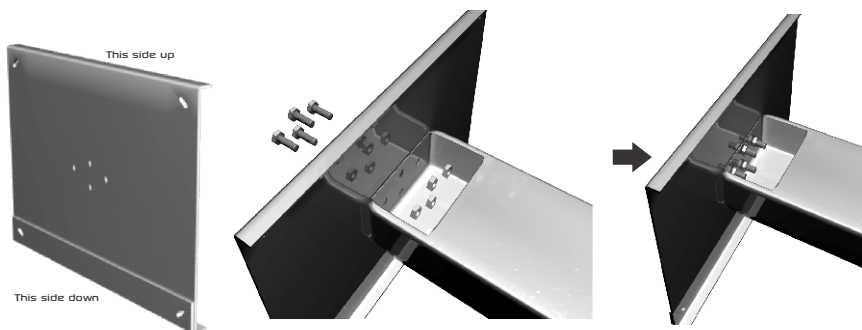


Step6: Fix Interactive mount on the wall by nuts & close the cover.

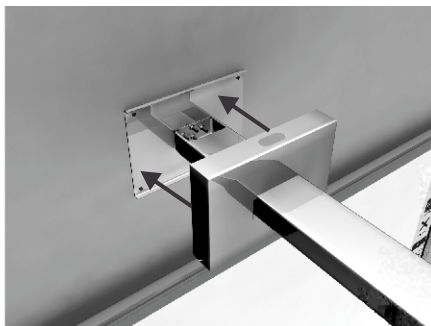

Step7: Hang short throw projector on EyeRIS Interactive Mount using spider and tilt set (as shown below)

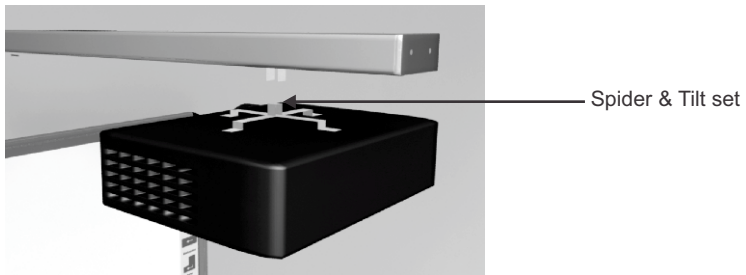


Step 8: After hanging the projector fix the front panel & branding plate.

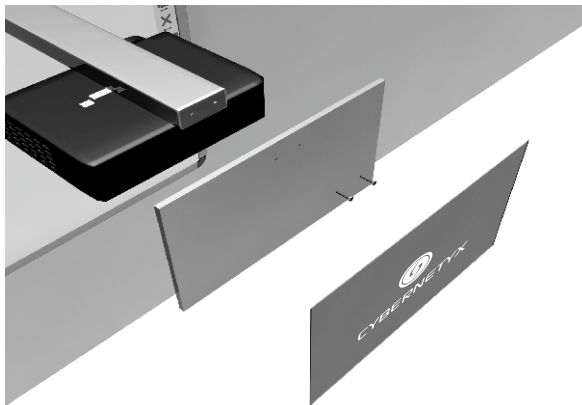

3. Stick OPTIBAR Strips as shown below.



4. Schematic of finished Setup

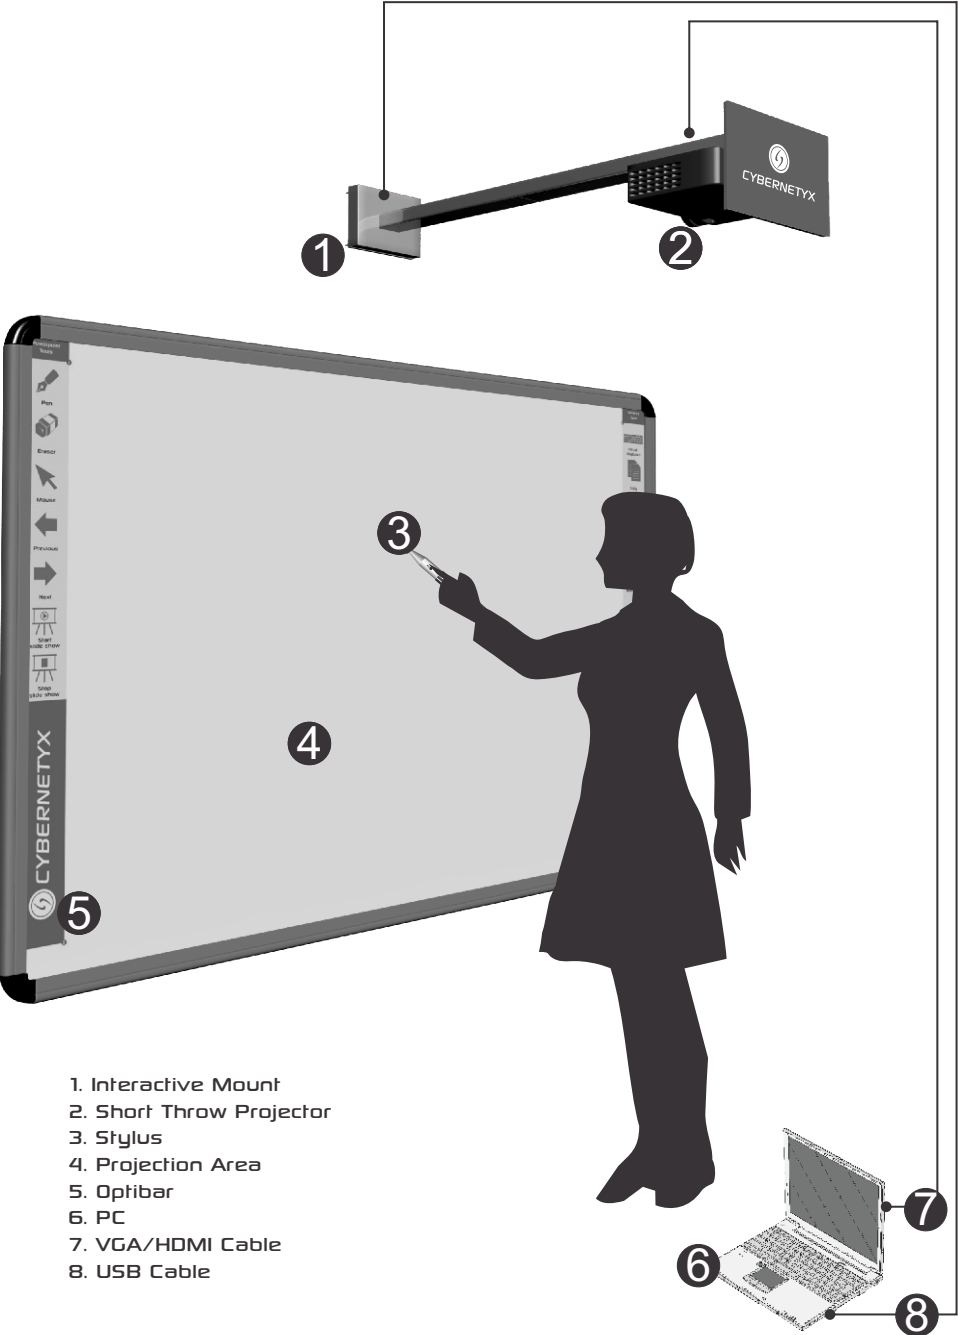

- 1. Interactive Mount
- 2. Short Throw Projector
- 3. Stylus
- 4. Projection Area
- 5. Optibar
- 6. PC
- 7. VGA/HDMI Cable
- 8. USB Cable